

# “T” AND “Y” DISTRIBUTORS



## SPECIFICATIONS:


- Made of specially modified polyamide (PA6)
- Free of halogen, phosphorus and cadmium
- Self-extinguishing
- Shock-resistant
- Temperature range: -40°C to +105°C (150° short term)
- IP66 protection. IP68/IP69 with O-rings
- “Easy-click” quick assembly and removal of the conduit without tools

## DESCRIPTION:

ANA-QUICK ‘T’ and ‘Y’ Distributors can be used to split the conduit for connection of multiple points. These connections are shipped split, for easy assembly to the conduit. They come in various combinations to join different sizes of conduits.

## “Y” DISTRIBUTOR

Item ID	For Conduit Size			Std. Pkg.
	A	B	C	
ARNY-171212	NW 17	NW 12	NW 12	1
ARNY-231717	NW 23	NW 17	NW 17	1
ARNY-292323	NW 29	NW 23	NW 23	1
ARNY-362929	NW 36	NW 29	NW 29	1
ARNY-483636	NW 48	NW 36	NW 36	1

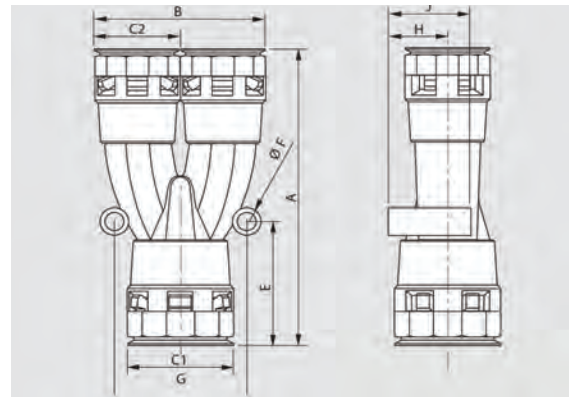

## “T” DISTRIBUTOR

Item ID	For Conduit Size			Std. Pkg.
	A	B	C	
ARNT-101010	NW 10	NW 10	NW 10	1
ARNT-121212	NW 12	NW 12	NW 12	1
ARNT-171717	NW 17	NW 17	NW 17	1
ARNT-232323	NW 23	NW 23	NW 23	1
ARNT-292929	NW 29	NW 29	NW 29	1
ARNT-363636	NW 36	NW 36	NW 36	1

